
BRASS CR PRESS FIT AND BSP STOP COCK [PFXF]

COMPLY WITH SS75-2:1978, BS EN 1254-2:1998
AS/NZS 4020:2018, BS EN 12165:2016,
SS 375:2015, BS 3457:1973


PRESSGUARD® The Complete Press-Fit Solution by Norika
A Product of the nPressGuard® Solution


Br BRASS DURABLE STABLE | MANUAL | RINSED | PRESS-FIT | FI Thread



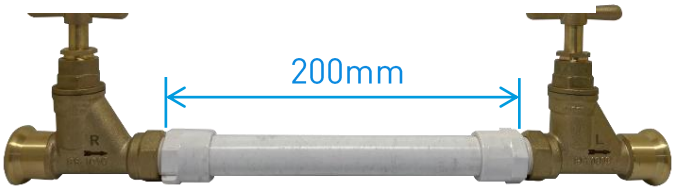



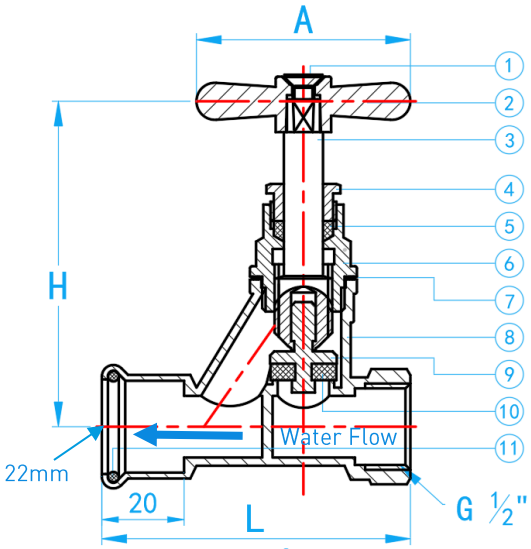

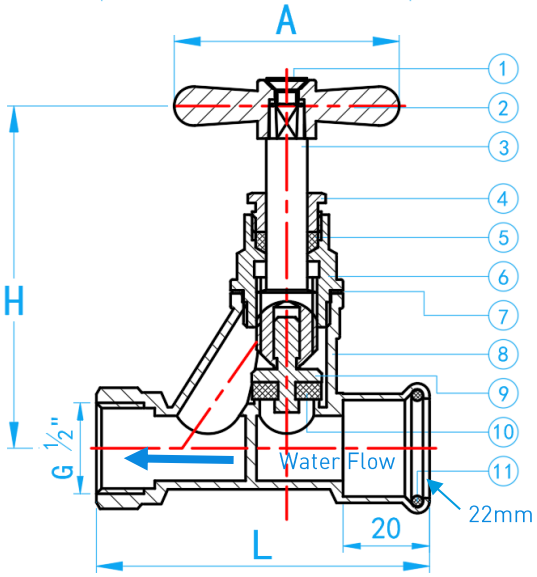

CROSS SECTIONAL VIEW

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Screw	Brass Or AISI 304
2	Handle	Brass CR
3	Spindle	Brass CR
4	Gland Nut	Brass CR
5	Gland Packing	Teflon
6	Head	Brass CR
7	Gasket	PTFE
8	Body	Brass CR
9	Washer Plate	Brass CR
10	Washer	EPDM
11	O-ring	EPDM

STANDARD SPECIFICATIONS

Working Pressure	200 Psi
Applicable Medium	Water

DIMENSIONS

SKU	Size	A (mm)	H (mm)	L(mm)	WEIGHT (kg)	PCS/CTN
SCCRPFN02015S	22mm×Rp 1/2"	52	85.6	75	0.540	1

*The tolerance for weight is ±5%

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.