BRASS CR PRESS FIT DOUBLE CHECK VALVE [PFXPF]


PRESSGUARD® The Complete Press-Fit Solution by Norika

A Product of the nPressGuard® Solution

Br BRASS DURABLE STABLE | PRESS-FIT | RINSED

COMPLY WITH BS EN 5154:1991
AS/NZS 4020:2018
BS EN 12165:2016
SS 375:2015, SS 270:2015



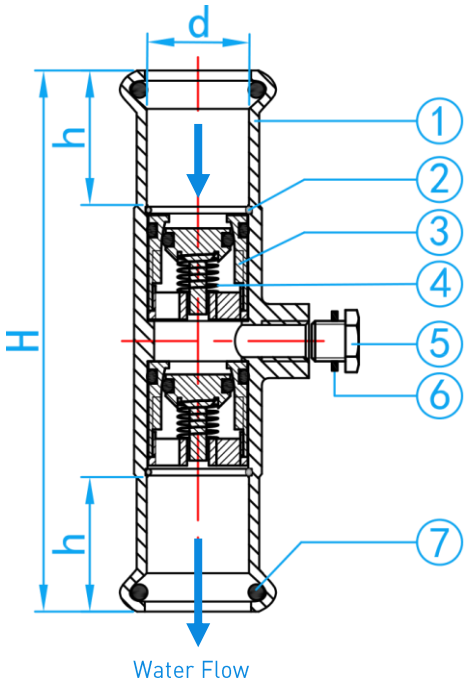

CROSS SECTIONAL VIEW

COMPONEN PARTS		
ITEM	PARTS	MATERIAL
1	Body	Brass CR
2	Snap Ring	AISI 304
3	Spool	ABS
4	Spring	AISI 304
5	Nut	Brass
6	Sealing	PTFE
7	O-ring	EPDM

STANDARD SPECIFICATION	
Working Pressure	200Psi
Working Temperature	0 ~ 80°C
Applicable Medium	Water

DIMENSIONS

SKU	SIZE d (mm)	h (mm)	H (mm)	WEIGHT (Kg)	PCS/CTN
DCVCRPFN015	15	20	80.5	0.080	160

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.