
DZR BRASS PRESS FIT Y STRAINER


COMPLY WITH BS EN 1092-2:1997
AS/NZS 4020:2018
BS EN 12165:2016
SS 375:2015
SS 270:2015

PRESSGUARD® The Complete Press-Fit Solution by Norika
A Product of the nPressGuard® Solution

Br BRASS DURABLE STABLE | RINSED | PRESS-FIT

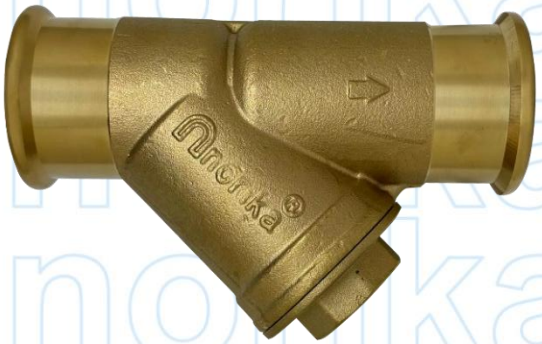

* Original Design By Norika®

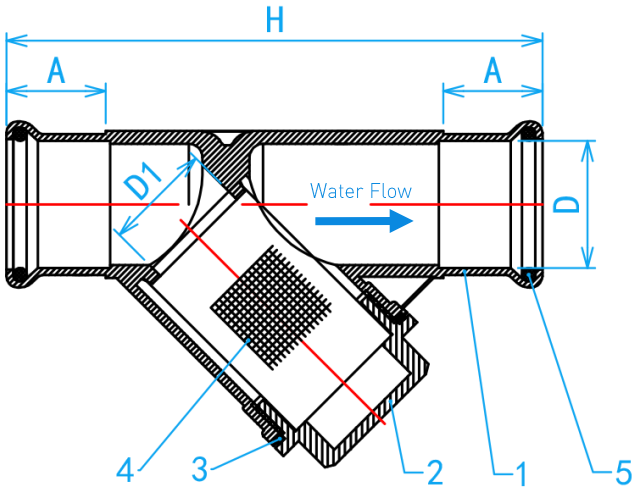

CROSS SECTIONAL VIEW

STANDARD SPECIFICATIONS	
Nominal Pressure	1.6Mpa
Working Medium	Water, Non Corrosive Liquid
Working Temperature	0℃<t≤100℃

STANDARD SCREENS		
Size	Hole Dia (mm)	Mesh NO'S
DN015-065	0.5	30

COMPONENT PARTS		
ITEM	PARTS	MATERIAL
1	Body	DZR Brass
2	Bonnet	DZR Brass
3	Valve Clack	PTFE
4	Filter	AISI304
5	O-ring	EPDM

DIMENSIONS

SKU	SIZE (inch)	D (mm)	D1 (mm)	A (mm)	H (mm)	WEIGHT (kg)	PACKAGE	
							PCS/BOX	PCS/CTN
YSCRPFN015	1/2"	$15^{+0.2}_{+0.3}$	12	20	87	0.130	10	160
YSCRPFN020	3/4"	$22^{+0.2}_{+0.3}$	19	21	101	0.230	10	100
YSCRPFN025	1"	$28^{+0.2}_{+0.3}$	24	23	117	0.360	8	64
YSCRPFN035	11/4"	$35^{+0.2}_{+0.3}$	28	26	117	0.425	6	48
YSCRPFN042	11/2"	$42^{+0.2}_{+0.3}$	35	30	144	0.705	5	30
YSCRPFN050	2"	$54^{+0.2}_{+0.3}$	45	36	174	1.133	4	16
YSCRPFN065	21/2"	$67^{+0.2}_{+0.3}$	65.5	50	200	1.784	3	12

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.