
BRASS CR PRESSFIT SPRING CHECK VALVE [PFXPF] WITH INSPECTION HOLE

PRESSGUARD® The Complete Press-Fit Solution by Norika


A Product of the nPressGuard® Solution

Br BRASS DURABLE STABLE | PRESS-FIT | RINSED

COMPLY WITH BS 5154:1991, BS EN 12288:2010, BS EN 12165:2016, AS/NZS 4020:2018, SS 375:2015, SS 270:2015

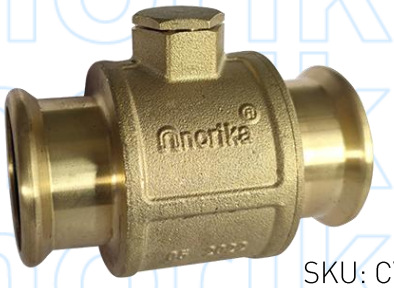


SKU: CVCRPFN015~42
CVCRPFN065

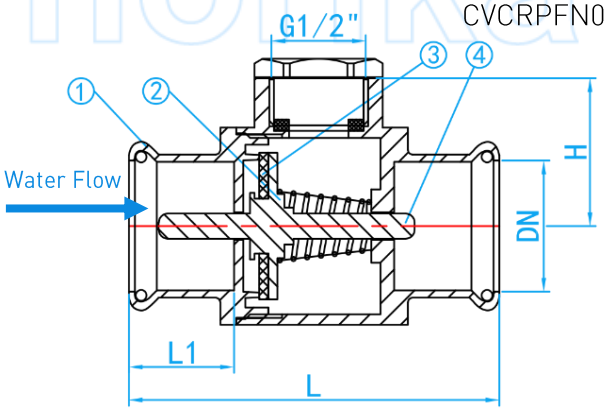



SKU: CVCRPFN050

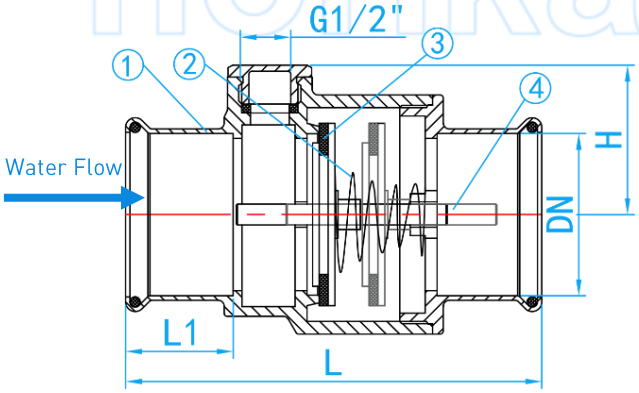

CROSS SECTIONAL VIEW

SPECIFICATION	
Operating pressure	PN16
Applicable Medium	Water

COMPONENT PARTS		
ITEM	PARTS	MATERIAL
1.	Body	Brass CR
2.	Spring	AISI 304
3.	Gasket	EPDM
4.	Spool	Brass CR



USAGE OF THE PRODUCT ACCORDING TO SS636

DIMENSIONS

SKU	DN (mm)	H (mm)	L1 (mm)	L (mm)	WEIGHT (kg)	PCS/CTN
CVCRPFN015	15	29.2	20	66.0	0.215	96
CVCRPFN020	20	33.3	21	70.5	0.290	72
CVCRPFN025	25	.5.5	23	81.0	0.370	54
CVCRPFN035	35	41.7	26	91.5	0.560	40
CVCRPFN042	42	44.8	30	104.5	0.730	30
CVCRPFN050	50	50.0	36	139.5	1.204	20
CVCRPFN065	65	62.3	50	161.5	2.000	12

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.