
EPOXY-COATED DUCTILE IRON SPRING LOADED BYPASS SILENT CHECK VALVE

DI DUCTILE IRON TOUGH FLEXIBLE

FLANGE

COMPLY WITH BS 5153:1974
SS 375:2015
BS EN 545:2010



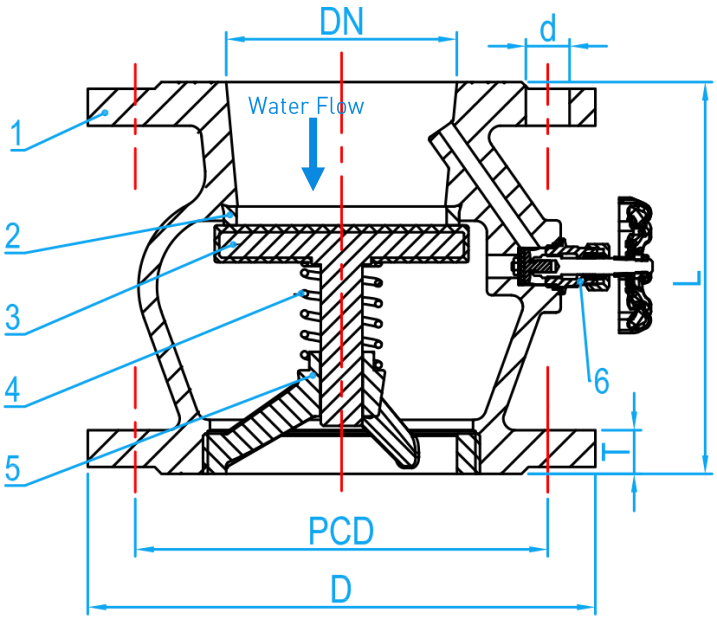

CROSS SECTIONAL VIEW

STANDARD SPECIFICATIONS	
Nominal Pressure	PN16
Operating Temperature	0 ~ 80°C

COMPONEN PARTS		
ITEM	PARTS	MATERIAL
1	Body	Epoxy-coated Ductile Iron
2	Valve Seat	Brass CR
3	Disc	Ductile Iron + EPDM
4	Spring	AISI 304
5	Sleeve	Ductile Iron
6	Piston	Brass + EPDM

DIMENSIONS

SKU	DN (mm)	L (mm)	T (mm)	D (mm)	PCD (mm)	NOS Of BOLT HOLES	d (mm)	WEIGHT (Kg)
CVDIN100FBP	100	170	22	220	180	8	19	12.60

Copyright © Liang Chew Hardware Pte Ltd. All Rights Reserved.
Liang Chew continually improves its products and reserves the right to modify specifications without prior notice.