LOCKABLE BLUE HANDLE STAINLESS STEEL 304 PRESS-FIT BALL VALVE


COMPLY WITH BSEN13828:2003


PRESSGUARD® The Complete Press-Fit Solution by Norika

A Product of the nPressGuard® Solution

QUALITY ASSURED norika SS304 INDUSTRY STANDARD STAINLESS STEEL

MANUAL | RINSED | Ball Valve | PRESS-FIT

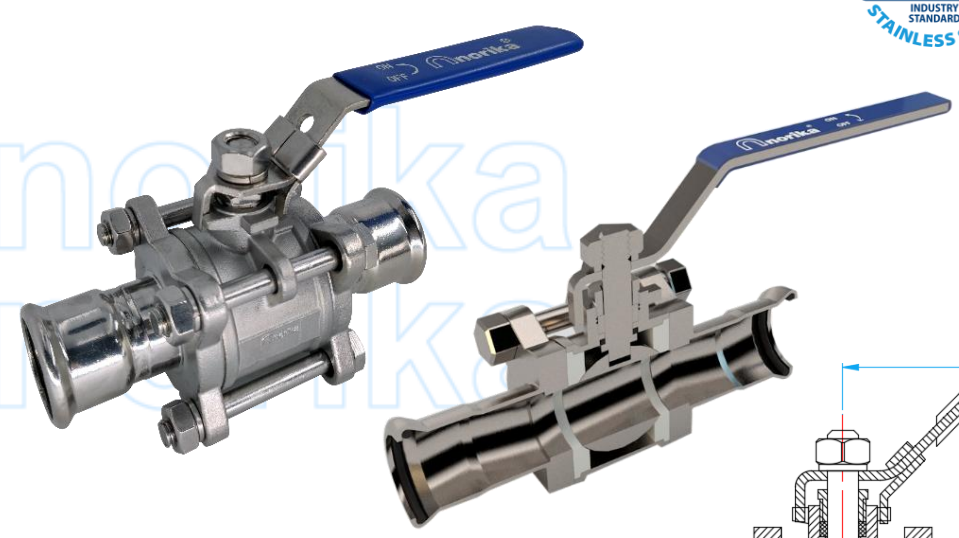

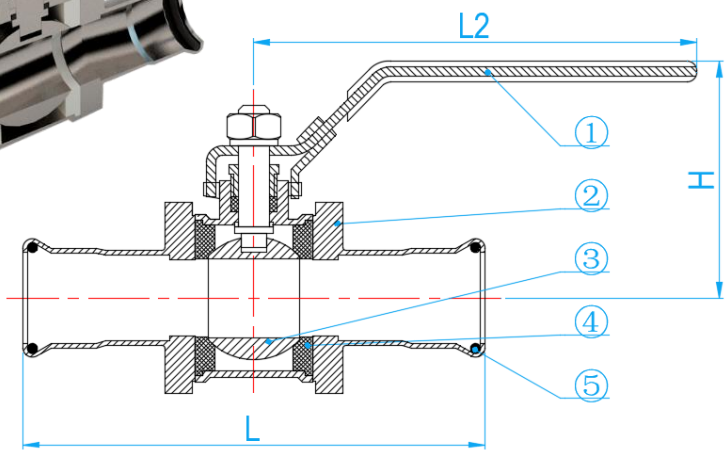

CROSS SECTIONAL VIEW

COMPONENT PARTS

ITEM	PARTS	MATERIAL
1	Handle	PVC Coated AISI304
2	Valve Body	AISI 304
3	Ball	AISI 304
4	Seat	PTFE
5	O-Ring	EPDM

STANDARD SPECIFICATIONS

Max Pressure	16bars
Working Medium	Water
Working Temperature	-20°C ≤ t ≤ 120 °C

DIMENSIONS

SKU	DN (mm)	H (mm)	L (mm)	L2 (mm)	WEIGHT (kg)	PCS/CTN
BV3PSSPFN015	15	53	117	95	0.555	28
BV3PSSPFN020	20	63	128	110	0.785	24
BV3PSSPFN025	25	73	144	120	1.020	15
BV3PSSPFN035	32	92	159	145	1.485	9
BV3PSSPFN042	42	93	183	155	2.015	6
BV3PSSPFN050	50	100	212	170	2.810	6
BV3PSSPFN065	65	123	286	180	5.635	1
BV3PSSPFN080	80	146	312	190	8.725	1
BV3PSSPFN100	100	163	392	200	16.145	1

Note: The tolerance for weight is ±5%

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.