EPOXY-COATED DUCTILE IRON HYDRAULICALLY CONTROLLED PILOT OPERATED FLOAT VALVE

DI DUCTILE IRON TOUGH FLEXIBLE

WATER TANK

QUALITY ASSURED norika SS304 INDUSTRY STANDARD STAINLESS STEEL

FLANGE


COMPLY WITH BS 1212-2:1990
BS EN 1092-2:1997, BS 1968:1953
BS EN 545:2010, AS/NZS 4020:2018
SS 375:2015, SS 270:2015



STANDARD SPECIFICATIONS	
Nominal Pressure	16 Bar
Working Medium	Water
Working Temperature	0 ⩽ t ⩽ 80℃

MAIN VALVE COMPONENT PARTS

ITEMS	PARTS	MATERIAL
1	Body	Epoxy-coated Ductile Iron
2	Valve Seat	AISI 304
3	Bolt and Nut	AISI 304
4	O-ring	EPDM
5	Spring	AISI 304
6	Stem	Stainless Steel
7	Diaphragm	EPDM
8	Diaphragm Press Plate	Epoxy-coated Ductile Iron
9	Bonnet	Epoxy-coated Ductile Iron
10	Mini Ball Valve	DZR Brass
11	Ball and Accessories	AISI 304

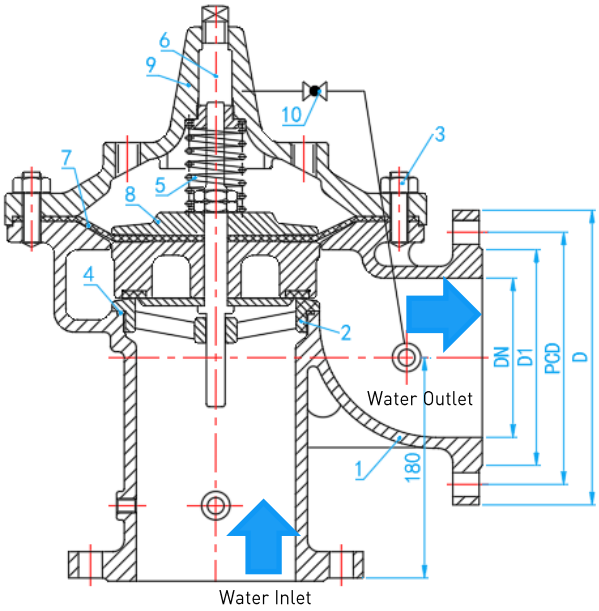


CROSS SECTIONAL VIEW

DIMENSIONS

SKU	DN (mm)	D1 (mm)	PCD (mm)	D (mm)	No. of Bolt And Aperture (mm)	WEIGHT (kg)	PCS/CTN
POVDIN100F	100	158	180	220	8-19	33.44	1
POVDIN150F	150	212	240	285	8-23	76.0	1

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.

HYDRAULICALLY CONTROLLED PILOT OPERATED FLOAT VALVE INSTALLATION
角式定水位阀安装图

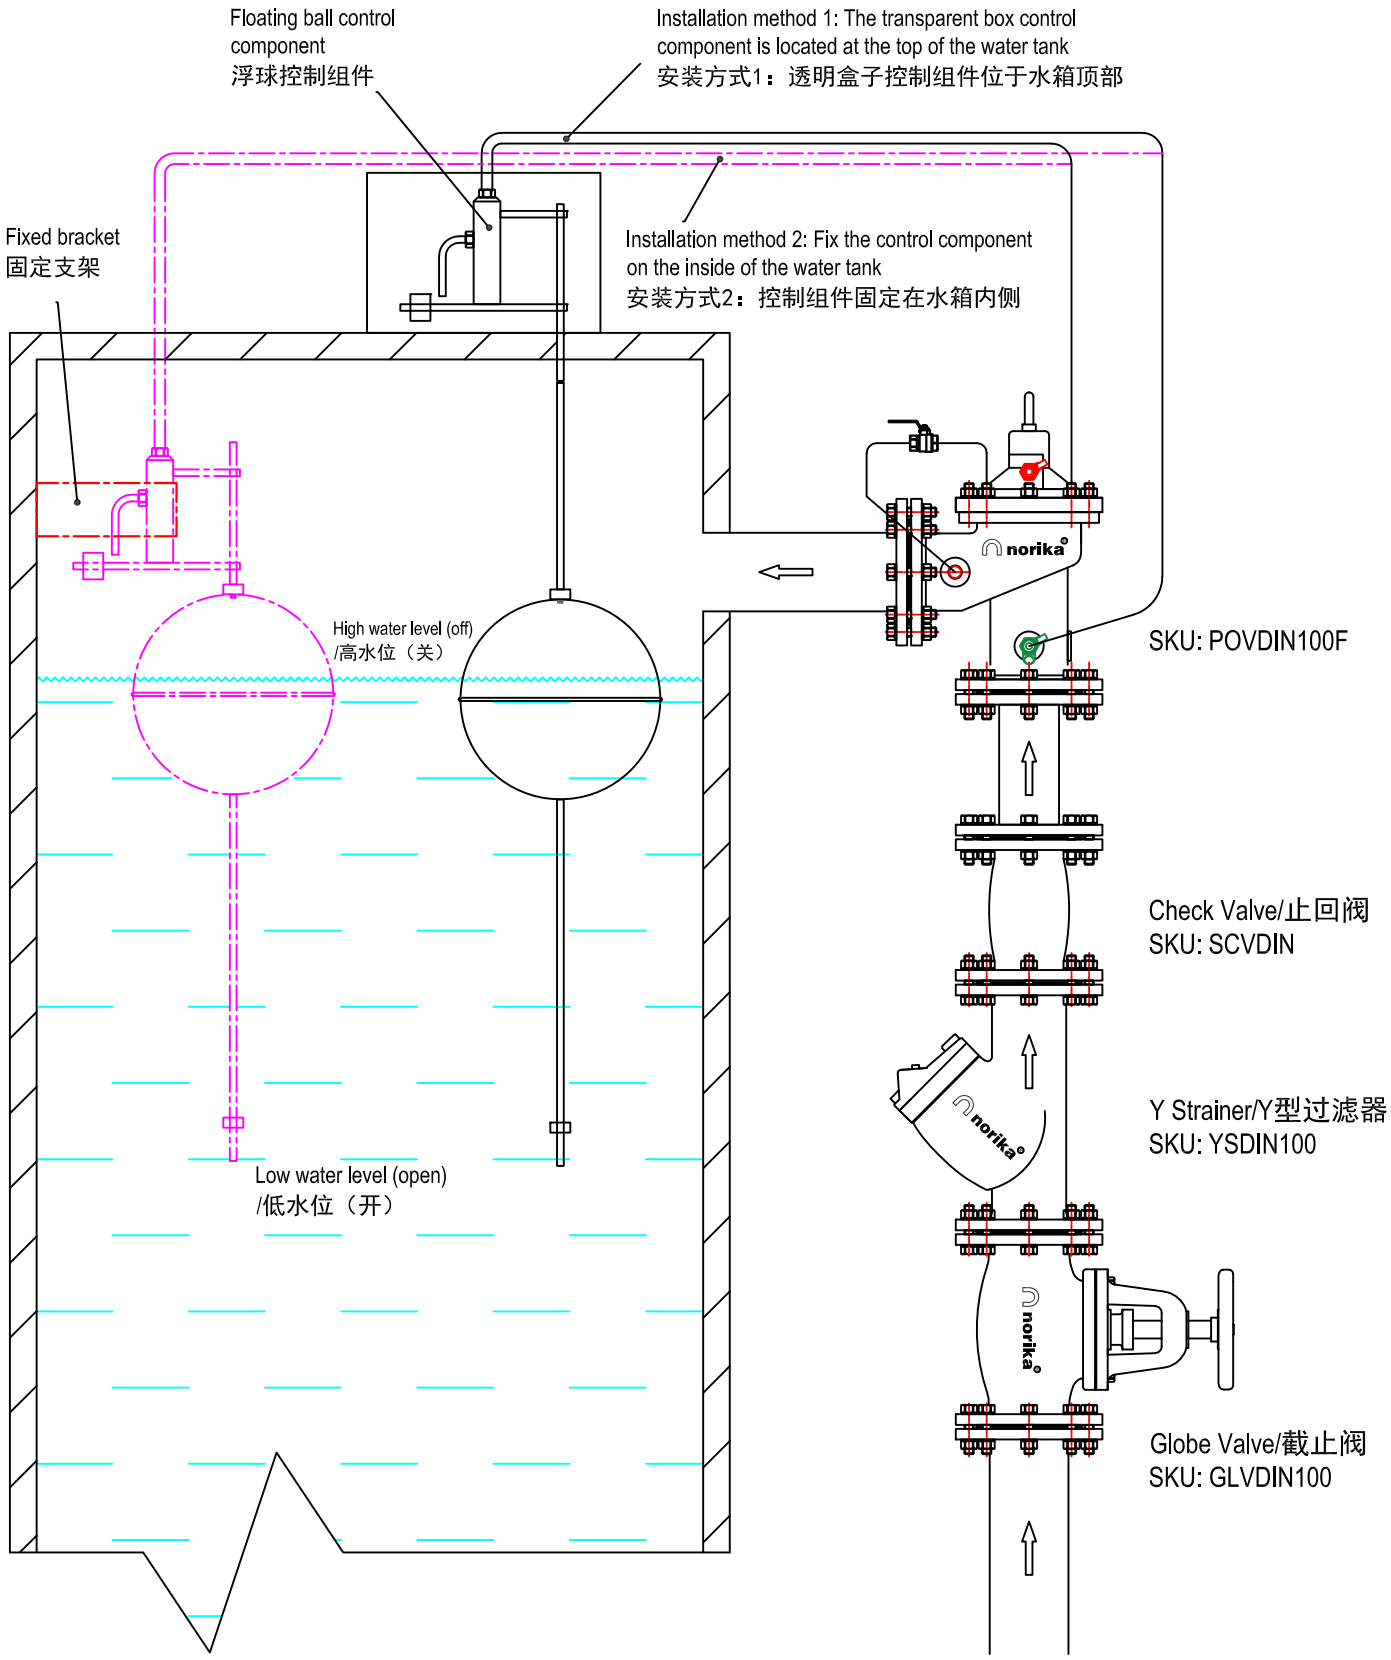

Revision:3	DATE/日期:2025/05/13