

PRESSFIT FITTING O-RING FOR HIGH TEMPERATURE

COMPLY WITH BSEN1254-2: 1998

A Product of the nPressGuard® Solution

RB RUBBER FLEXIBLE PROTECTIVE | MANUAL | RINSED | O Ring

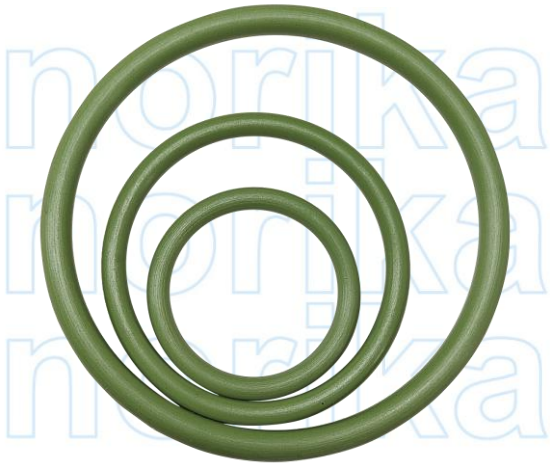

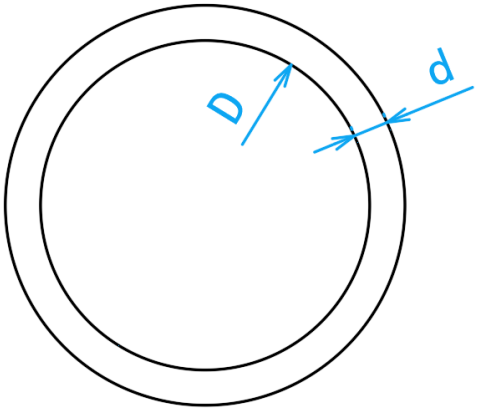

CROSS SECTIONAL VIEW

CHARACTERISTIC
• Material: FKM (Fluorocarbon Elastomer)
• Working Temperature: -25℃~200℃
• Oil-resistant, corrosion-resistant, aging-resistant

DIMENSIONS

SKU	SIZE (mm)	D (mm)	d (mm)	WEIGHT (g)	PCS/BAG
PFNORH015	15	15.2	2.62	0.5	100
PFNORH020	22	22.2	3.20	1.1	100
PFNORH025	28	28.0	3.20	1.3	100
PFNORH035	35	35.0	3.30	1.9	50
PFNORH042	42	42.0	4.15	3.7	50
PFNORH050	54	54.3	4.20	4.7	50
PFNORH065	65	67.4	6.15	14.2	10
PFNORH080	76	77.0	7.20	21.9	10
PFNORH100	108	109.5	10.2	62.7	10

Copyright © Norika®. All Rights Reserved.
Norika continually improves its products and reserves the right to modify specifications without prior notice.