

STAINLESS STEEL 304

PRESS FIT FITTINGS


(M PROFILE)

COMPLY WITH BSEN1254-2: 1998

MI SOCKET



A Product of the nPressGuard® Solution

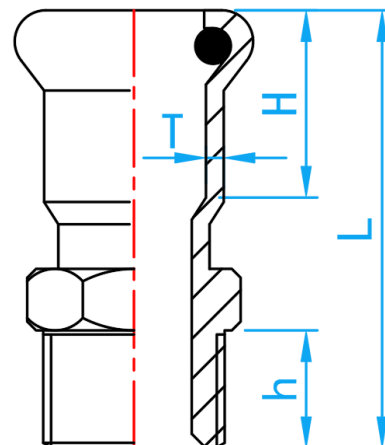

CROSS SECTIONAL VIEW

STANDARD SPECIFICATION

Working Pressure	16 Bar
Working Temperature	0 ~ 85°C
Applications	Hot and cold potable water system.

DIMENSIONS

SKU	SIZE (mm x inch)	L (mm)	H (mm)	h (mm)	T (mm)	WEIGHT (kg)	PCS/CTN
SSPFNMIA01515	15 × 1/2" BSPT	51.0	20	15	1.5	0.044	420
SSPFNMIA02015	22 × 1/2" BSPT	53.0	20	15	1.5	0.060	170
SSPFNMIA02020	22 × 3/4" BSPT	55.0	21	16	1.5	0.065	200
SSPFNMIA02025	22 × 1" BSPT	70.0	24	16	1.5	0.105	130
SSPFNMIA02515	28 × 1/2" BSPT	66.5	24	14	1.5	0.075	130
SSPFNMIA02520	28 × 3/4" BSPT	58.0	24	16	1.5	0.082	130
SSPFNMIA02525	28 × 1" BSPT	62.0	33	19	1.5	0.105	130
SSPFNMIA03515	35 × 1/2" BSPT	76.0	26	15	1.5	0.095	80
SSPFNMIA03520	35 × 3/4" BSPT	75.0	26	15	1.5	0.100	80
SSPFNMIA03525	35 × 1" BSPT	67.0	26	21	1.5	0.120	80
SSPFNMIA03535	35 × 1 1/4" BSPT	70.0	26	21	1.5	0.160	80
SSPFNMIA03542	35 × 1 1/2" BSPT	82.0	28	22	1.5	0.165	66
SSPFNMIA03550	35 × 2" BSPT	92.0	26	26	1.5	0.300	38
SSPFNMIA04215	42 × 1/2" BSPT	81.0	31	14	1.5	0.120	50
SSPFNMIA04220	42 × 3/4" BSPT	82.0	31	16	1.5	0.132	50
SSPFNMIA04225	42 × 1" BSPT	84.0	24	22	1.5	0.150	50
SSPFNMIA04235	42 × 1 1/4" BSPT	75.0	31	21	1.5	0.180	50
SSPFNMIA04242	42 × 1 1/2" BSPT	75.0	31	21	1.5	0.195	66
SSPFNMIA04250	42 × 2" BSPT	96.0	31	21	1.5	0.320	50
SSPFNMIA05020	54 × 3/4" BSPT	94.0	35	16	1.5	0.178	60
SSPFNMIA05025	54 × 1" BSPT	95.0	35	19	1.5	0.198	50
SSPFNMIA05035	54 × 1 1/4" BSPT	96.0	35	20	1.5	0.232	38
SSPFNMIA05042	54 × 1 1/2" BSPT	95.0	35	21	1.5	0.246	38
SSPFNMIA05050	54 × 2" BSPT	88.0	36	26	1.5	0.320	38
SSPFNMIA06565	67 × 2 1/2" BSPT	110.0	50	30	1.8	0.735	15
SSPFNMIA08065	76 × 2 1/2" BSPT	115.0	55	30	2.0	0.626	24
SSPFNMIA08080	76 × 3" BSPT	117.0	55	32	2.0	0.825	24
SSPFNMIA100100	108 × 4" BSPT	148.0	80	35	2.0	1.243	10