

STAINLESS STEEL 304


PRESS FIT FITTINGS

(M PROFILE)

COMPLY WITH BSEN1254-2: 1998

REDUCEING SOCKET

A Product of the nPressGuard® Solution

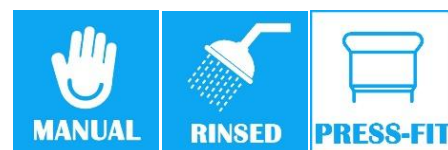


STANDARD SPECIFICATION

Working Pressure	16 Bar
Working Temperature	0 ~ 85°C
Applications	Hot and cold potable water system.

DIMENSIONS

SKU	SIZE (mm)	L (mm)	H (mm)	h (mm)	T (mm)	t (mm)	WEIGHT (kg)	PCS/CTN
SSPFNRS02015	22 × 15	63	21	20	1.5	1.5	0.054	200
SSPFNRS02515	28 × 15	68	23	20	1.5	1.5	0.068	160
SSPFNRS02520	28 × 22	65	23	21	1.5	1.5	0.075	130
SSPFNRS03515	35 × 15	73	26	20	1.5	1.5	0.087	160
SSPFNRS03520	35 × 22	73	26	21	1.5	1.5	0.083	120
SSPFNRS03525	35 × 28	74	26	23	1.5	1.5	0.097	80
SSPFNRS04215	42 × 15	83	31	20	1.5	1.5	0.110	120
SSPFNRS04220	42 × 22	80	31	21	1.5	1.5	0.122	130
SSPFNRS04225	42 × 28	80	31	23	1.5	1.5	0.125	100
SSPFNRS04235	42 × 35	82	31	26	1.5	1.5	0.133	70
SSPFNRS05015	54 × 15	93	36	20	1.5	1.5	0.166	70
SSPFNRS05020	54 × 22	92	36	21	1.5	1.5	0.162	70
SSPFNRS05025	54 × 28	93	36	23	1.5	1.5	0.175	100
SSPFNRS05035	54 × 35	94	36	26	1.5	1.5	0.180	70
SSPFNRS05042	54 × 42	94	36	31	1.5	1.5	0.207	70
SSPFNRS06515	67 × 15	114	50	20	1.8	1.5	0.300	25
SSPFNRS06520	67 × 22	114	50	21	1.8	1.5	0.310	25
SSPFNRS06525	67 × 28	116	50	23	1.8	1.5	0.300	25
SSPFNRS06535	67 × 35	115	50	26	1.8	1.5	0.310	25
SSPFNRS06542	67 × 42	117	50	31	1.8	1.5	0.320	25
SSPFNRS06550	67 × 54	119	50	36	1.8	1.5	0.347	36
SSPFNRS08025	76 × 28	120	51	23	2.0	1.5	0.380	20
SSPFNRS08035	76 × 35	123	51	26	2.0	1.5	0.400	20
SSPFNRS08042	76 × 42	128	51	31	2.0	1.5	0.435	20
SSPFNRS08050	76 × 54	129	51	36	2.0	1.5	0.430	36
SSPFNRS08065	76 × 67	141	51	50	2.0	1.8	0.520	20
SSPFNRS10042	108 × 42	158	75	31	2.0	1.5	0.790	12
SSPFNRS10050	108 × 54	162	75	36	2.0	1.5	0.810	12
SSPFNRS10065	108 × 67	180	75	50	2.0	1.8	0.905	12
SSPFNRS10080	108 × 76	180	75	51	2.0	2.0	0.942	12

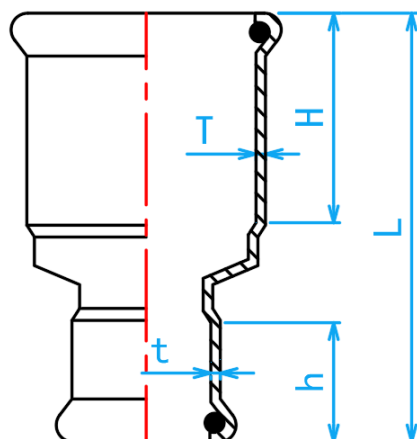

CROSS SECTIONAL VIEW