

STAINLESS STEEL 304

PRESS FIT FITTINGS


(M PROFILE)

COMPLY WITH BSEN1254-2: 1998

MI 90° ELBOW



A Product of the nPressGuard® Solution

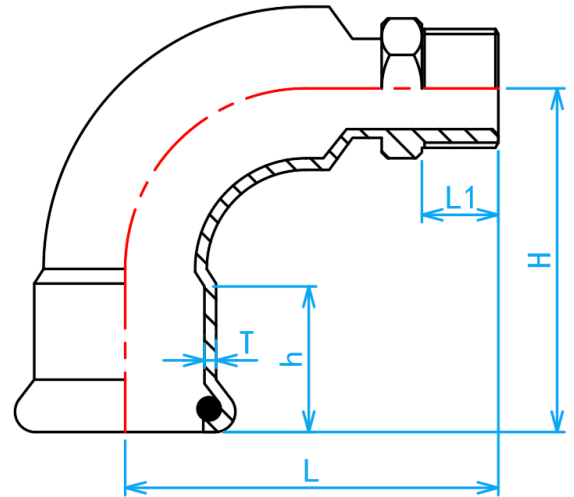

CROSS SECTIONAL VIEW

STANDARD SPECIFICATION

Working Pressure	16 Bar
Working Temperature	0 ~ 85°C
Applications	Hot and cold potable water system.

DIMENSIONS

SKU	SIZE (mm × inch)	H (mm)	L (mm)	h (mm)	L1 (mm)	T (mm)	WEIGHT (kg)	PCS/CTN
SSPFNMIE01515	15 × 1/2" BSPT	43.0	42.0	20	15	1.5	0.060	300
SSPFNMIE02015	22 × 1/2" BSPT	50.0	46.0	21	15	1.5	0.080	200
SSPFNMIE02020	22 × 3/4" BSPT	50.0	50.0	21	16	1.5	0.092	160
SSPFNMIE02515	28 × 1/2" BSPT	60.0	68.0	23	19	1.5	0.120	100
SSPFNMIE02525	28 × 1" BSPT	60.0	68.0	23	19	1.5	0.145	70
SSPFNMIE03515	35 × 1/2" BSPT	72.0	78.0	26	15	1.5	0.162	50
SSPFNMIE03520	35 × 3/4" BSPT	72.0	80.0	26	16	1.5	0.176	50
SSPFNMIE03525	35 × 1" BSPT	72.0	73.0	26	19	1.5	0.180	50
SSPFNMIE03535	35 × 1 1/4" BSPT	72.0	74.0	26	21	1.5	0.225	55
SSPFNMIE04225	42 × 1" BSPT	85.0	93.0	26	19	1.5	0.255	50
SSPFNMIE04242	42 × 1 1/2" BSPT	85.0	84.0	31	21	1.5	0.300	33
SSPFNMIE05025	54 × 1" BSPT	105.0	112.0	36	19	1.5	0.365	40
SSPFNMIE05050	54 × 2" BSPT	105.0	105.0	36	26	1.5	0.485	21
SSPFNMIE06565	67 × 2 1/2" BSPT	143.0	131.5	50	26	1.8	0.970	12